

# Tender specification – Trampoline combination – modutramp® - the eye

## Trampoline combination – modutramp® - the eye


Art. No. 7234002



[tuev-sued.de/ps-zert](http://tuev-sued.de/ps-zert)



reddot design award  
honourable mention 2012

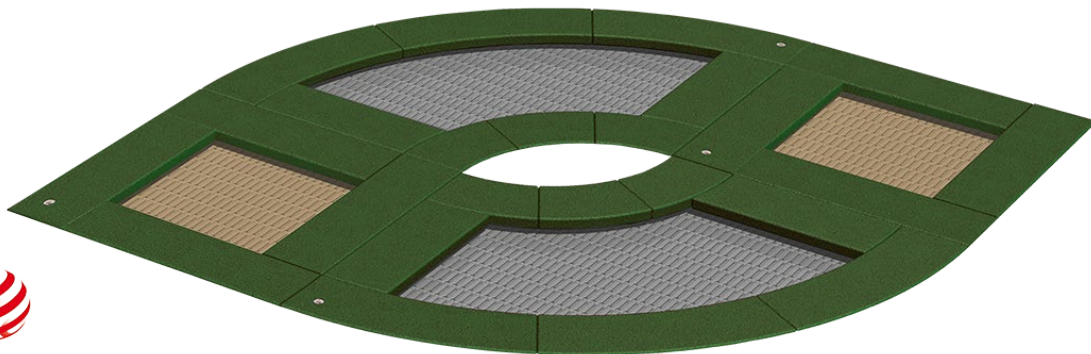

*modutramp®*  
feel free to be creative

## Technical data

Unit space area 4.38 x 2.85 m  
Jumping area 3.02 m<sup>2</sup>  
Safety space area 9.62 x 6.31 m  
Height of unit 0.00 m  
Max. free drop height 0.90 m

Age range 3+  
Number of users 4

Heaviest component 230 kg  
Total weight 720 kg  
Assembly time 4.00 hours  
Installers 2-3 persons  
Foundations none

## If you have any questions, we'd be happy to help:

smb Seilspielgeräte GmbH Berlin in Hoppegarten  
Technikerstraße 6/8  
DE-15366 Hoppegarten

Fon. +49 (0) 3342 50837-20  
Fax. +49 (0) 3342 50837-80

[info@smb.berlin](mailto:info@smb.berlin)  
[www.smb.berlin](http://www.smb.berlin)

## **Tender specification**

Jumping device combination - unit space area 4.38 x 2.85 m, jumping area in total 3.02 m<sup>2</sup>.

consisting of:

2 x modutramp® switch

Jumping devices in a square design – single unit space area 1.25 x 1.25 m, single jumping area 0.53 m<sup>2</sup>. Frame made of durable, hot-dip galvanized steel construction.

Closed jumping surface, made of dyed through polyamide wing lamellas with conical seat joints to reduce the load on the steel wire ropes and with nubby GRIPTAQ® surface for optimal grip in all directions of movement.

Rim with shock-absorbing fall protection plates. Including 64 highly robust DURAPTEQ® screw plate tension springs with noise-reducing plain bearing sleeves.

Installation depth: 0.45 m, at ground level.

2 x modutramp® 90

Jumping devices describe an angle of 90 degrees - single unit space area 1.85 x 1.85 m, single effective jumping area 0.98 m<sup>2</sup>. Frame made of durable, hot-dip galvanized steel construction.

Closed jumping surface, made of dyed through polyamide wing lamellas with conical seat joints to reduce the load on the steel wire ropes and with nubby GRIPTAQ® surface for optimal grip in all directions of movement.

Rim with shock-absorbing fall protection plates. Including 80 highly robust DURAPTEQ® screw plate tension springs with noise-reducing plain bearing sleeves.

Installation depth: 0.45 m, at ground level.

Foundations are not required - the jumping device is completely assembled at the factory and delivered ready for installation.

Maintenance and cleaning of the interior can be done quickly and easily via the jump mat. Hook notches on the DURAPTEQ® springs make work easier. Installation and operating costs are minimized!

### **Selectable colors:**

Fall protection rim - in the standard colors Black, Moss green, Reddish brown. Special colors available on request.

Jump mat - available in the standard colors Persidion black, Borneo green, Alpaca gray, Pearl blackberry, Bengal red, Jakarta orange, Mocha brown, Bali yellow, Lapis blue and Sand beige. Individual colors available on request.

---

### **If you have any questions, we'd be happy to help:**

smb Seilspielgeräte GmbH Berlin in Hoppegarten  
Technikerstraße 6/8  
DE-15366 Hoppegarten

Fon. +49 (0) 3342 50837-20  
Fax. +49 (0) 3342 50837-80

info@smb.berlin  
www.smb.berlin